

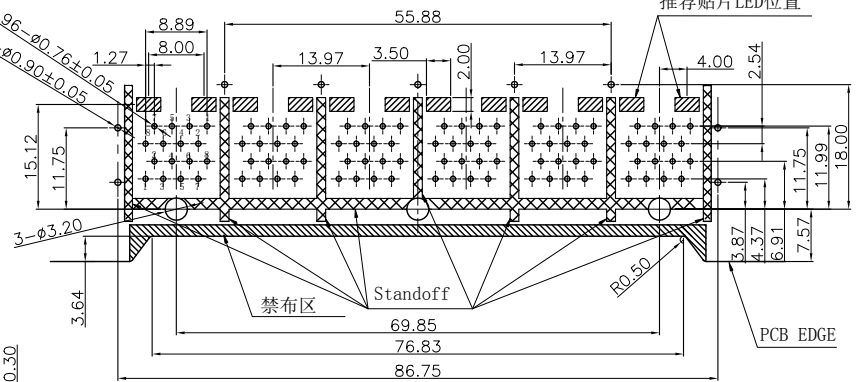
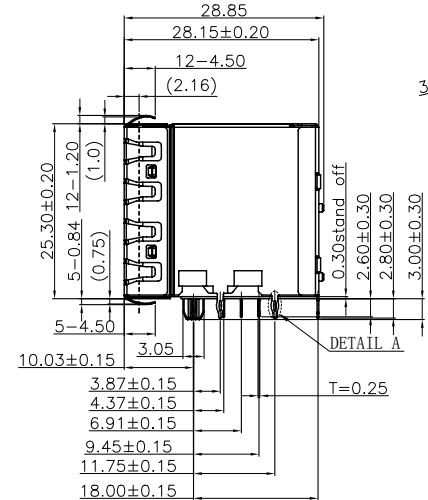


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

43156-0 0 X X X 1
规格流水码
S:半金亮锡
M:半金雾锡
电镀代码
34-6u"
32-15u"
31-30u"

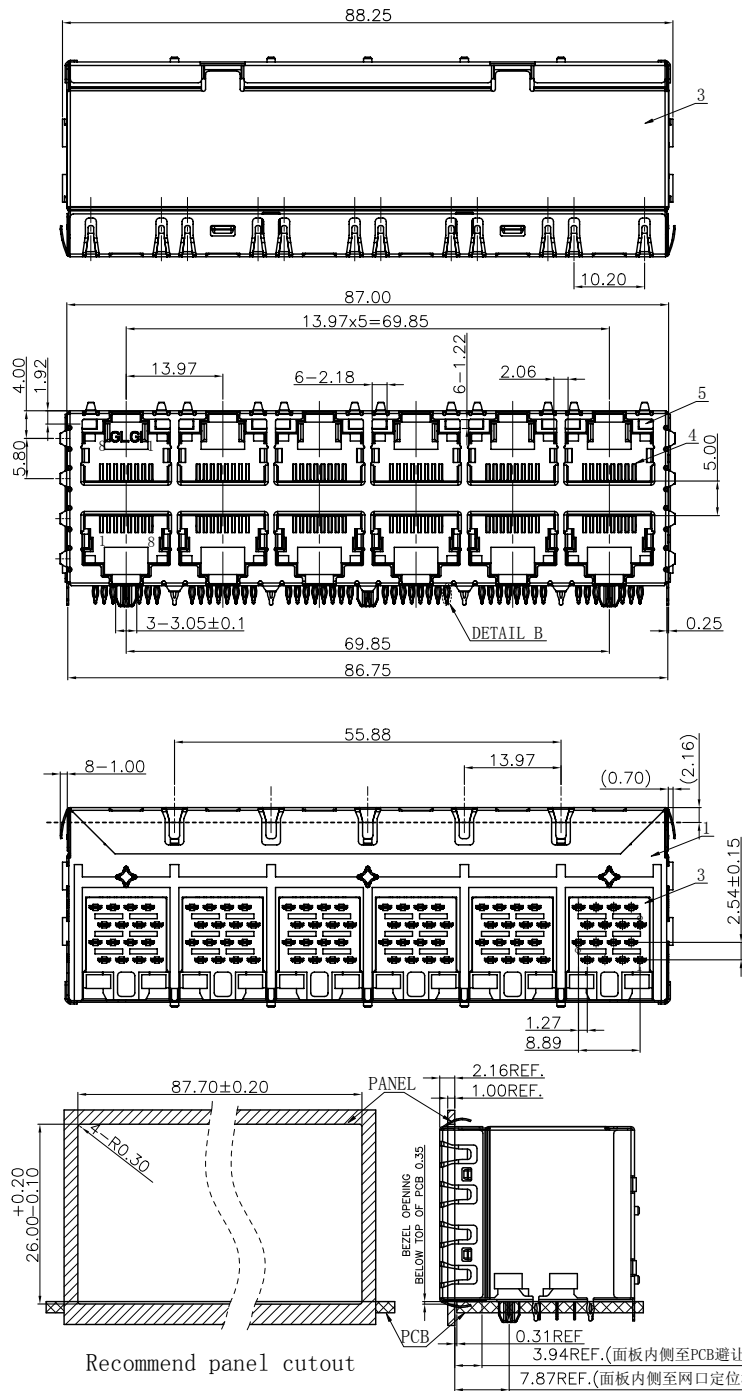

RECOMMENDED P. C. B LAYOUT TOP VIEW
(Component side tolerance ±0.05 THICKNESS=1.6mm)

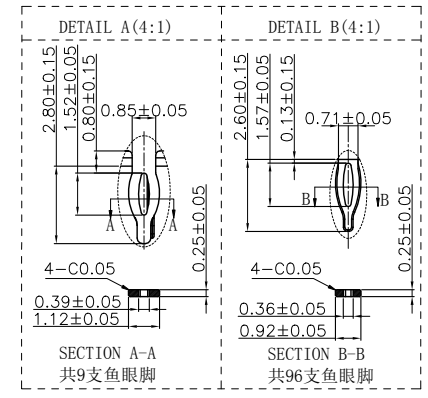

- MATERIALS:
1. Housing: PA46 BLACK UL 94V-0 (RoHS)
2. Insert: PBT BLACK UL 94V-0 (RoHS)
3. Shielding: C7701R-H; T=0.25mm.
4. Contact: 0.35*0.46mm
Phosphor Bronze.
5. LIGHT PIPE: CLARITY PC
※LED灯建议尺寸: 3.5max*2.0max*1.5max
※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
※凡注▲记号者为重点尺寸。

产品客户图 Customer Drw		.X ±0.35		设计 DESIGN		品名 TITLE	
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.XX	±0.25		角法 PROJ.	校对 CHECKED	料号 ITEM NO.	5921-Q-S-K25-2x6-8C-V-6P
	.XXX	±0.15					
	X°	±2°					
比例 SCALE	1:1	大小 SIZE	A4	版本 REV.	P0	图号 DWG NO.	43156-00XXX1
张数 SHEET	1/1	核准 APPROVED		核淮 APPROVED		图号 DWG NO.	GLG-W0-XXX

GLGNET® 深圳市方向电子股份有限公司
Shenzhen GLGNET Electronics Co.,LTD.