

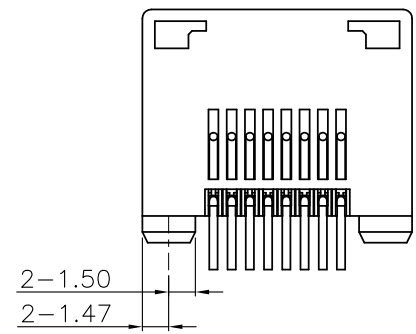
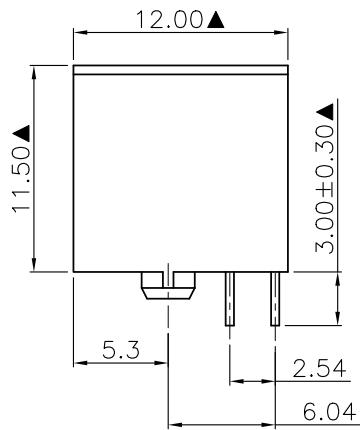


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

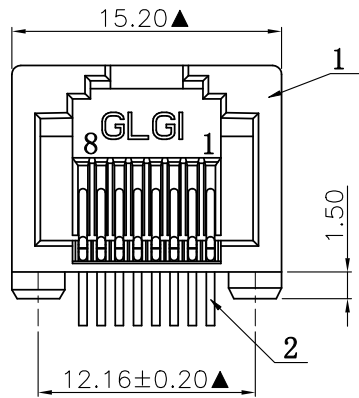


41425-24 G XX 1

规格流水码

电镀代码

- 05-G/F
- 11-3u"
- 15-6u"
- 19-15u"
- 23-30u"
- 24-50u"

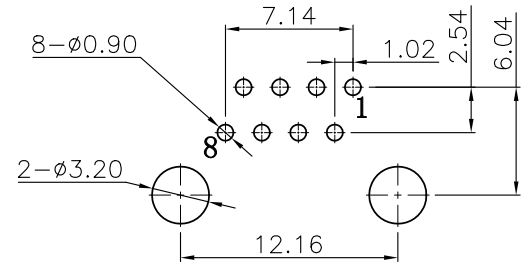

RECOMMENDED P. C. B LAYOUT TOP VIEW
(COMPONENT SIDE) TOLERANCE ±0.05

NOTES:

1. Housing: PA46 BLACK (RoHS).
 2. Contact: ∅0.46 DIA Phosphor Bronze, Gold flash Plating Over Nickel (RoHS).
 3. Durability: 750 Cycles Min;
 4. Connector Mating, Unmating Force: 30N Max.
 5. Plug Retention Force: 50N min, 60s ±5s.
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- ※The Dimensions Marked "▲" Symbols Are Stand For Key Characteristics.

产品客户图 Customer Drw				设计		品名	
未注公差	.X	±0.35	GLGNET® 深圳市方向电子股份有限公司 Shenzhen GLGNET Electronics Co.,LTD.	设计		品名	5633-8P8C-2A-24
TOLERANCE	.XX	±0.25		校对		料号	41425-24GXX1
UNLESS OTHERWISE SPECIFIED	.XXX	±0.15		核准		图号	GLG-W0-596
比例	1:1	角法	PROJ.	设计		图号	GLG-W0-596
张数	1/1	大小	A4	校对		图号	GLG-W0-596
SHEET		SIZE		CHECKED		DWG NO.	
单位	mm	版本	P0	核准			
UNIT		REV.		APPROVED			