


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE

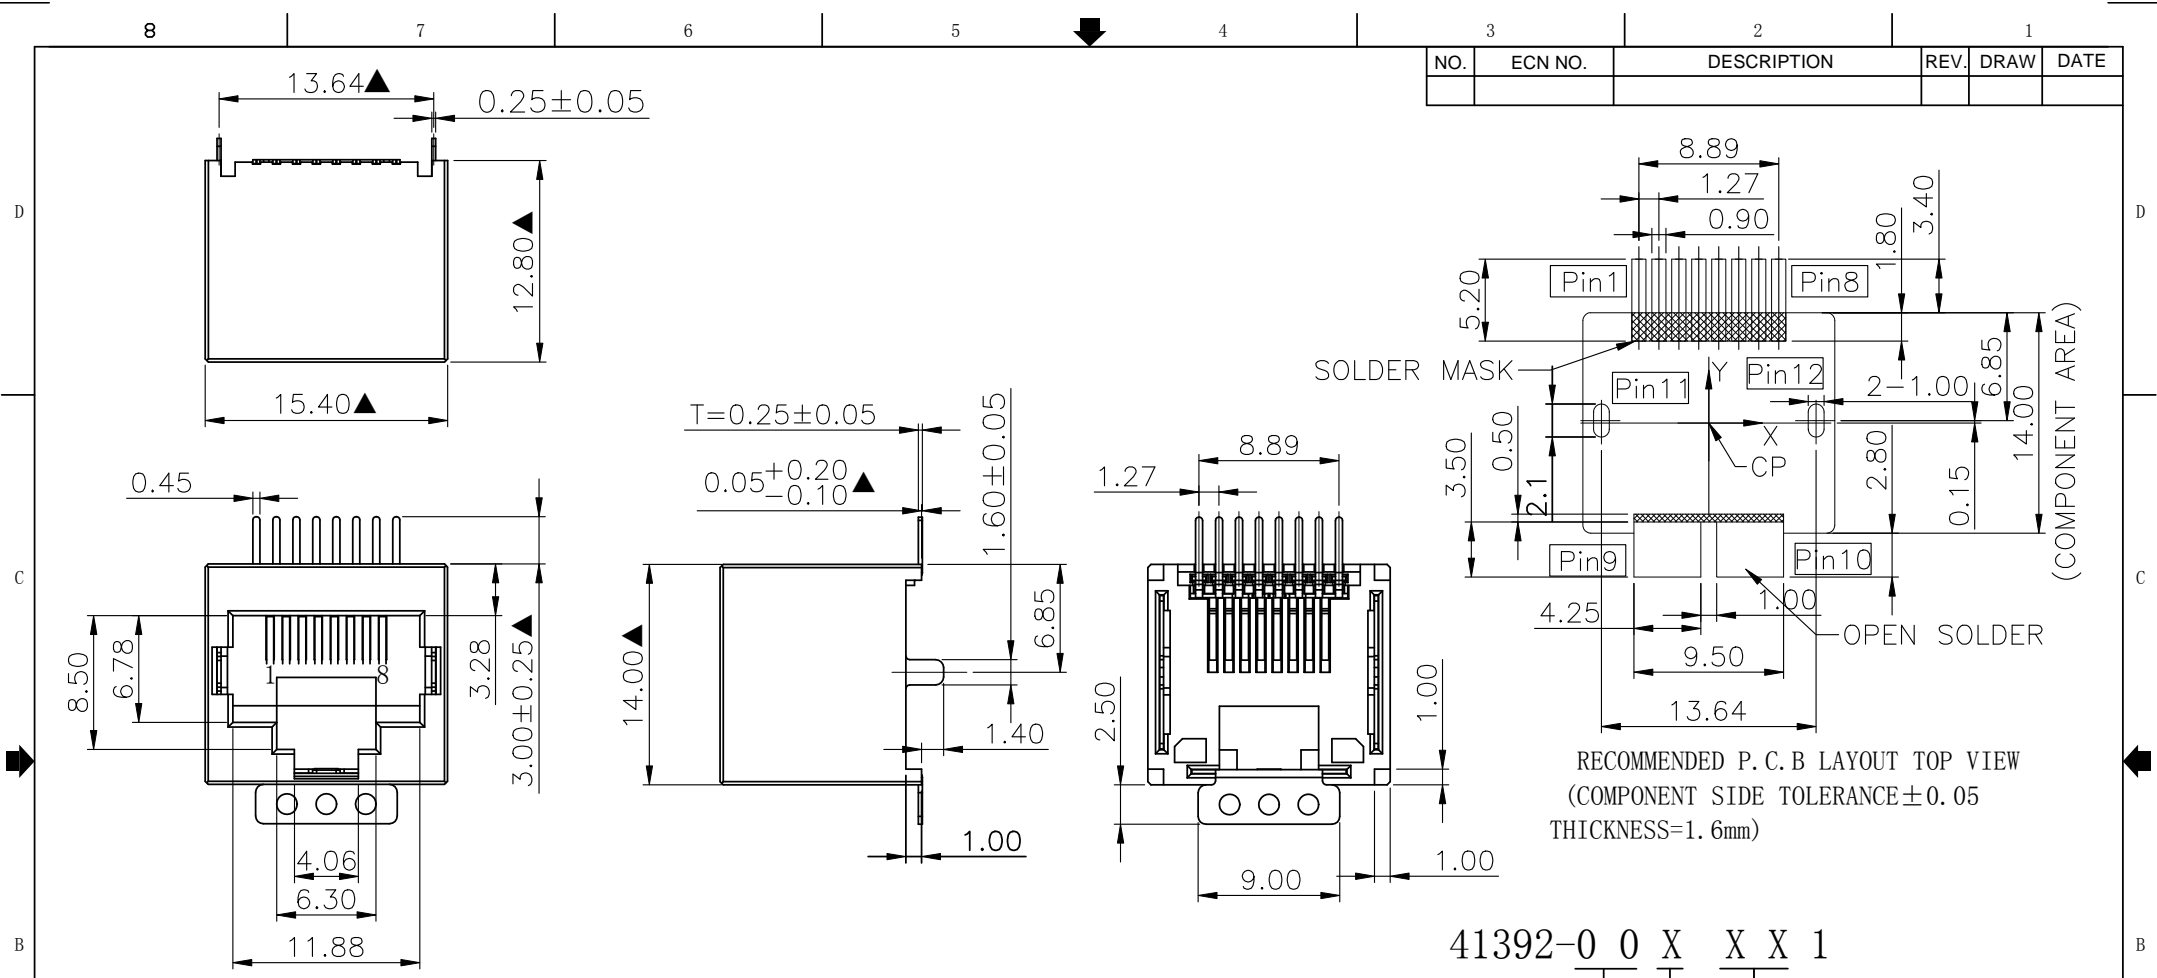

RECOMMENDED P.C.B LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE ±0.05
THICKNESS=1.6mm)

41392-0 0 X X X 1

规格流水码
S:半金亮锡
M:半金雾锡

电镀代码
-05-G/F
-11-3u"
-15-6u"
-19-15u"
-23-30u"

MATERIALS:
 1.Housing:LCP Black UL94V-0(RoHS).
 2.Contact:C5210-EH, T=0.25(RoHS).
 3.Phosphor Bronze gold Plating Over Nickel(RoHS).
 4.Contact electroplate:This product is suitable for wave soldring process.
 ※MATES WITH MODULAR PLUG CONFORMING TO FCC PAR 68, SUBPART F.
 ※The Dimensions Marked"▲" Symbols Are Stand For Key Characteristics.

electrical specification:
 1.Voltage Rating:125 VAC RMS.
 2.Current Rating: 1.5A Max @25° C;
 3.Contact Resistance: 20 mΩ Max;
 4. Insulation Resistance: 500 MΩ Min. @500 VDC;
 5. Dielectric withstanding Voltage:
 1000 V DC or AC peak, for 1 minute 0.5
 mA contact-to-contact.

environmental characteristics:
 1. Stockpile Temperature: - 40 ° C to 70° C;
 2. Operating Temperature: - 40 ° C to 70° C;
 3. storage Time: 12 Months
 4. Reflow Temperature: 265°C ± 5°C, 10Second

产品检验图 Inspection Drw		GLGNET® 深圳市方向电子股份有限公司 SHEN ZHEN GLGNET ELECTRONICS CO.,LTD.			
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X	±0.35	设计 DESIGN	品名 TITLE	5223-Q-S-SMT-8P8C-5A
	.XX	±0.25			
	.XXX	±0.15			
	X°	±2°			
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN	品名 TITLE	5223-Q-S-SMT-8P8C-5A
张数 SHEET	1/1	大小 SIZE	A4	校对 CHECKED	料号 ITEM NO.
单位 UNIT	mm	版本 REV.	A2	核准 APPROVED	图号 DWG NO.
					41392-00XXX1
					GLG-W0-881 GLG-110732