

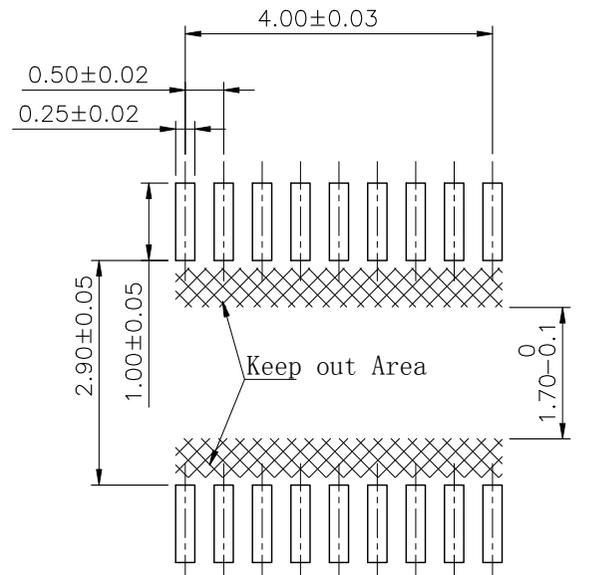
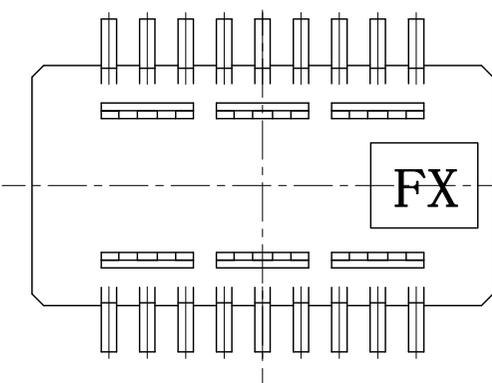


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

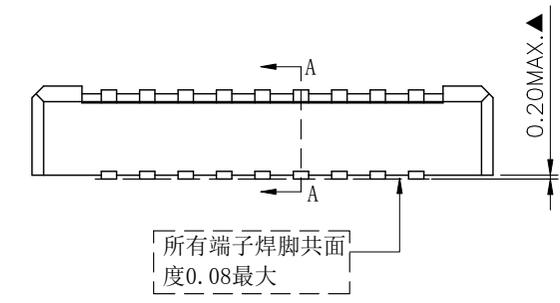

RECOMMENDED PCB LAYOUT
RECOMMENDED METAL MASK THICKNESS: 0.05mm

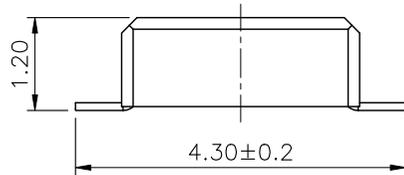

- NOTES:
- HOUSING: LCP UL94V-0, BLACK
 - CONTACT: COPPER ALLOY.
 - THE HOUSING WITH WITHSTAND EXPOSURE UP TO 260° PEAK TEMPERATURE FOR 30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR REFLOW OVEN.
 - ▲ DENOTES CRITICAL DIMENSION.

16009-6_0 J X X 1
规格流水码
电镀规格
J 全金
12-Au: 4u", Ni: 50-100u"
17-Au: 8u", Ni: 50-100u"

产品客户图 Customer Drw						品名			
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X	±0.20	设计 DESIGN	设计 DESIGN	品名 TITLE	BTB M-SV-1-2x9-P050-H12	张数 SHEET		
	.XX	±0.15						校对 CHECKED	料号 ITEM NO.
	.XXX	±0.08							
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN						
张数 SHEET	1/1	大小 SIZE	A4	校对 CHECKED			16009-60JXX1		
单位 UNIT	mm	版本 REV.	A3	核准 APPROVED			图号 DWG NO.		
							GLG-WS-448		

GLGNET 深圳市方向电子股份有限公司
SHEN ZHEN GLGNET ELECTRONICS CO., LTD.