

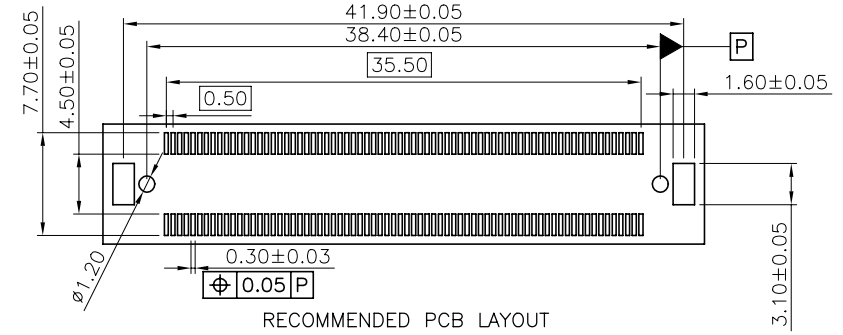
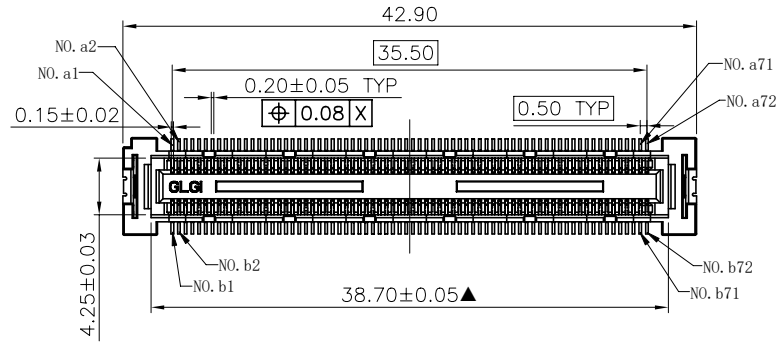
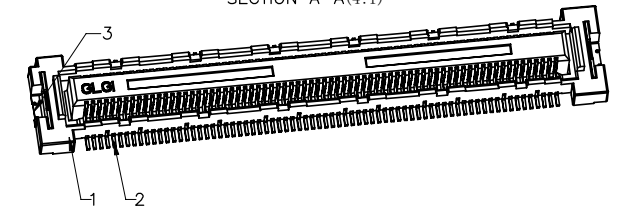

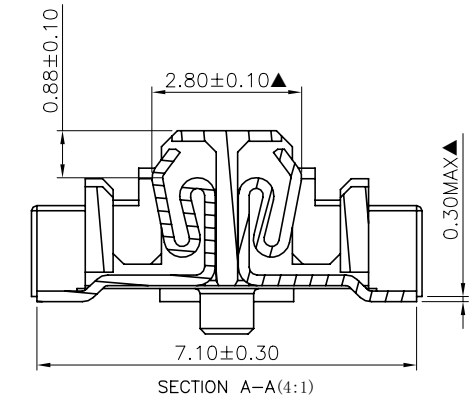


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

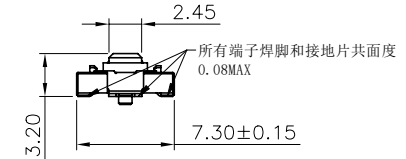

RECOMMENDED PCB LAYOUT TOLERANCE:±0.05mm

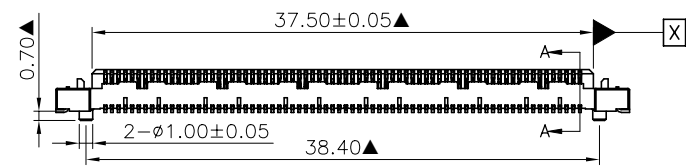

16002-XXXXX1
 成品识别码
 J17: Ni50-100u", Au8u"
 J23: Ni50-100u", Au30u"
 规格流水码

- NOTES:
- HOUSING: LCP UL94V-0, NATURAL
 - CONTACT: COPPER ALLOY.
 - GROUND LUG: COPPER ALLOY.
 - THE HOUSING WITH WITHSTAND EXPOSURE UP TO 260° PEAK TEMPERATURE FOR 30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR REFLOW OVEN.
 - ▲DENOTES CRITICAL DIMENSION.

比例 SCALE		张数 SHEET		单位 UNIT		角法 PROJ.		设计 DESIGN		品名 TITLE	
1:1	1/1	mm	mm	A0	角法 PROJ.	设计 DESIGN	设计 DESIGN	品名 TITLE	BTB F-SV-1-2x72-P050-H32-00		
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	. X	±0.20	. XX	±0.15	. XXX	±0.08	X°	±3°	GLGNET® 深圳市方向电子股份有限公司		料号 ITEM NO.
									SHEN ZHEN GLGNET ELECTRONICS CO., LTD.		16002-00XXX1
									核准 APPROVED		图号 DWG NO.
											GLG-WS-370