
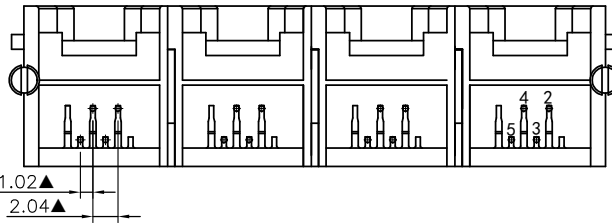
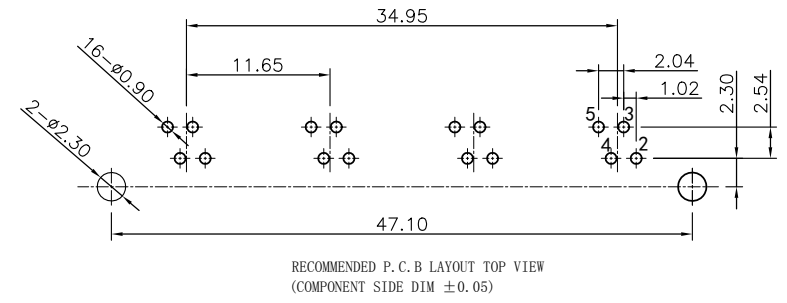
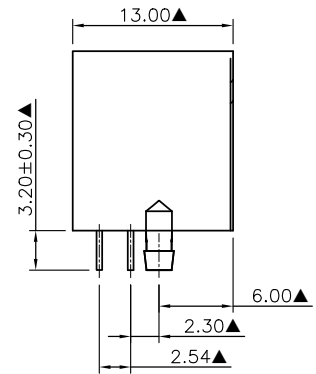


NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

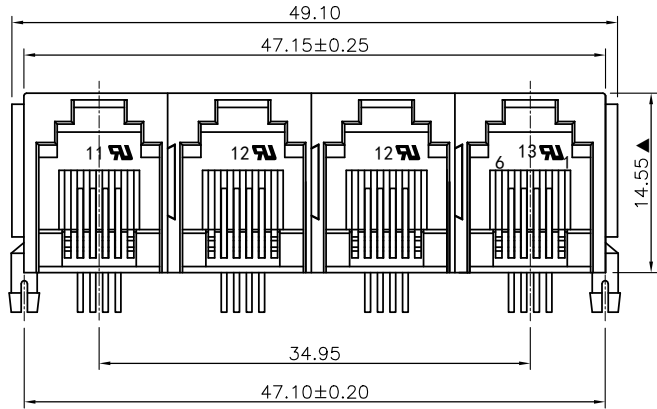


11090-02GXX1

规格流水码 | 电镀代码

—05-G/F

—11-3u"

—15-6u"

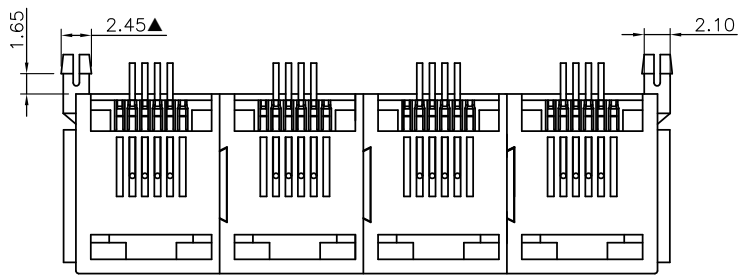

**MATERIALS:**

- Housing: PBT 冷灰色3U UL94V-0. (RoHS)
  - Contact: 0.46mm DIA Phosphor Bronze, Gold Flash Plating Over Nickel. (RoHS)
  - Durability: 750 Cycles Min;
  - Connector Mating, Unmating Force: 30N Max.
  - Plug Retention Force: 50N min, 60s±5s.
- ※MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
- ※The Dimensions Marked "▲" Symbols Are Stand For Key Characteristics.

**Electrical specification:**

- Voltage Rating: 125 VAC RMS.
- Current Rating: 1.5A Max @25° C;
- Contact Resistance: 20 mΩ Max;
- Insulation Resistance: 500 MΩ Min. @500 VDC;
- Dielectric withstanding Voltage: 1000 V DC or AC peak, for 1 minute 0.5 mA contact-to-contact.

**Environmental characteristics:**

- Stockpile Temperature: - 40 ° C to 70 ° C;
- Operating Temperature: - 40 ° C to 70 ° C;

产品客户图 Customer Drw		TOLERANCE UNLESS OTHERWISE SPECIFIED		设计 DESIGN		品名 TITLE	
未注公差	.X	±0.35	角法 PROJ.	设计		品名	5521-4R-6P4C-00 Assembly
	.XX	±0.25	大小 SIZE	校对 CHECKED		料号	11090-02GXX1
	.XXX	±0.15	版本 REV.	核准 APPROVED		图号	GLG-WD-009
	X°	±2°	单位 UNIT				

**GLGNET** 深圳市方向电子股份有限公司  
Shenzhen GLGNET Electronics Co.,LTD.