
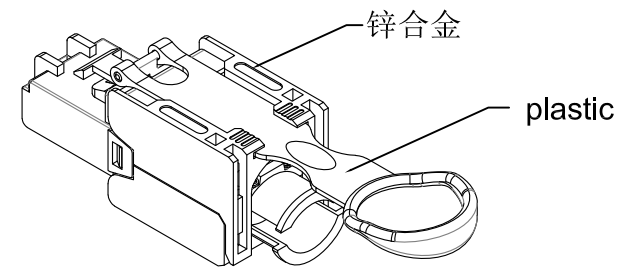
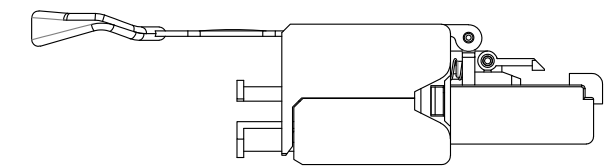



# Mechanical

NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE

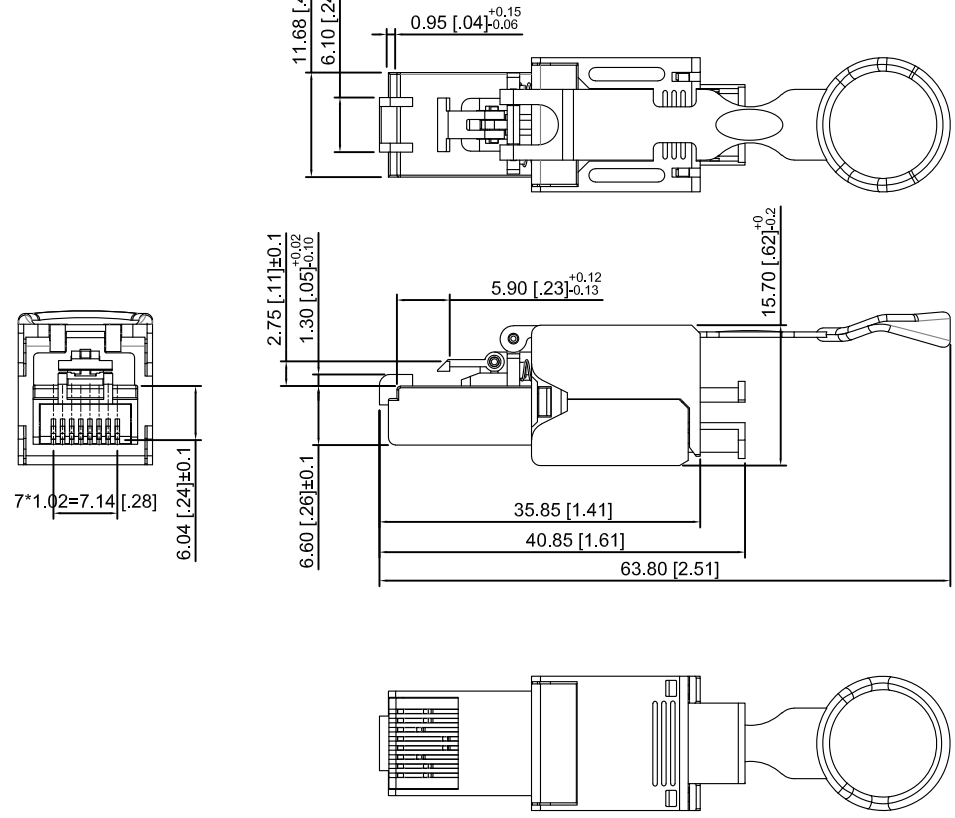

## MATERIALS

1.本体塑壳:GLASS FILLED ABS+PC UL94V-0(ROHS)
1.解锁拉环:GLASS FILLED PP(BLACK/雾面) UL94V-0(ROHS)
3.端子:磷青铜,接触区:镀金30U(MIN),底层:镀镍50U(MIN). IDC区:镀镍+锡
4.外壳:锌合金镀镍 min 3um
4.JACK CAVITY CONFORMS TO IEC 60603-7-51
6.OPERATING TEMPERATURE:-40°C TO +85°C. STORAGE TEMPERATURE:-40°C TO +85°C.

## Electrical Requirement

1.Electrical Voltage:125V
2.Electrical Current:1.5A(温升小于30°C)
3.Dielectric withstanding Voltage:1000VDC(PIN间) 1500VDC(PIN 到 外壳)
4.Insulation Resistance:500MQ Min.
5.接触电阻:20mΩ max(插头插座互配合位置) 5mΩ max(IDC卡接位置初始值)

Description				GLGNET® 深圳方向电子有限公司 SHEN ZHEN GLGNET ELECTRONICS CO.,LTD.			
CAT 6A 现场做线 RJ45水晶头(网线搭接)				料号 ITEM NO.	JGMU1S001B	设计 DRAW	WANGKG
				品名 TITLE		校对 CHECK	DANNY
Dimension Tolerance: 0.xx:±0.10[.004] x.xx:±0.25[.010] xx.xx:±0.25[.010]				客户 CUSTOMER	BYANG	核准 APPROVAL	
				图号 DWG NO.		日期 DATE	06/08/2020
比例 SCALE	1:1	单位 UNIT	mm	角法 PROJ.		版本 REV	A0
张数 SHEET	1/2	备注 REMARK					