

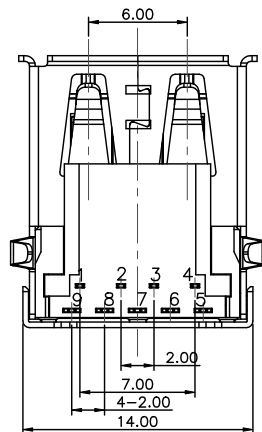
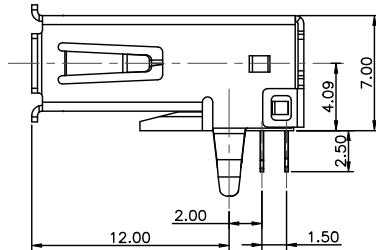
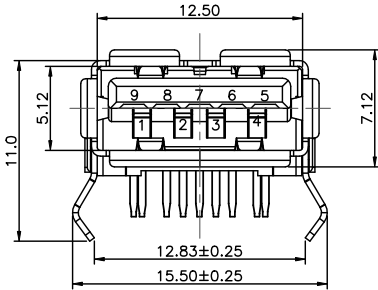


8 7 6 5 4 3 2 1

NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					



- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PBT ;UL94 V-0 BLUE.
 - 1-2.4P/5P CONTACTS:PHOSPHOR BRONZE T=0.20mm.
 - 1-3.SHELL:BRASS C2680 T=0.30mm.
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - Ni 50u" . UNDER PLATED OVERALL.
 - AuFu"MIN PLATED ON THE FUNCTIONAL AREA OF CONTACT. 80u" TIN PLATED ON SOLDER AREA.
 - 2-2.SHELL:
 - Ni 50u" MIN. PLATED OVERALL.
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 35N MAX.
 - 3-2.REMOVAL FORCE: 10N Min INITIAL
8N Min AFTER TEST.
 - 3-3.DURABILITY: 1500 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1.CONTACT RESISTANCE:30mΩ Max FOR INITIAL; 10mΩ CHANGE AFTER DURABILITY TEST;
 - 4-2.INSULATION RESISTANCE: 100MΩ MIN
 - 4-3.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 - 4-4.CONTACT CURRENT RATING: 1.5A .
- 5.RoHS COMPLIANT.
- 6.THT REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 5 SECONDS AT 245±5°C.
- 7.PRODUCT NUMBER NOTE:

08013-00 S xx 9

- RoHS COMPLIANT.
- PLATING CODE:
- 05: Au Fu"; 19: Au15u"
- PLATING SPECIFICATION:
- S: HALF THE GOLD BRIGHT TIN
- TYPE SERIAL NUMBER
- PRODUCT SERIAL NUMBER
- USB TYPE

产品客户图 Customer Drw		GLGNET® 深圳市方向电子股份有限公司 SHEN ZHEN GLGNET ELECTRONICS CO.,LTD.						
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	.X .XX .XXX X°	±0.35 ±0.25 ±0.15 ±2°	设计 DESIGN	hu g, l	20220413	品名 TITLE	USB-DIP90-M-3A-9P-C1-00	
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN	hu g, l	20220413	品名 TITLE	USB-DIP90-M-3A-9P-C1-00	
张数 SHEET	1/2	大小 SIZE	A4	校对 CHECKED		料号 ITEM NO.	08013-00S059	
单位 UNIT	mm	版本 REV.	A0	核准 APPROVED		图号 DWG NO.	GLG-140142	

8 7 6 5 4 3 2 1

