
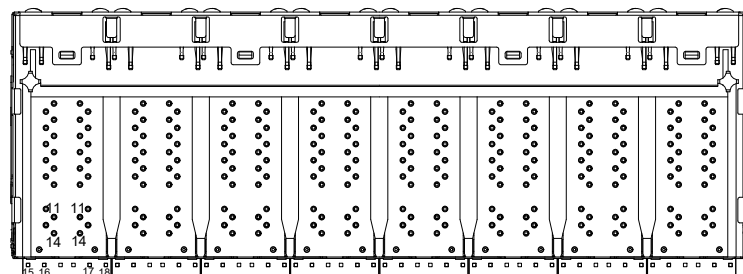
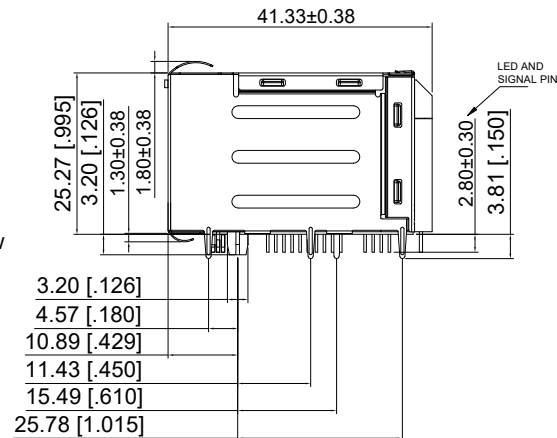
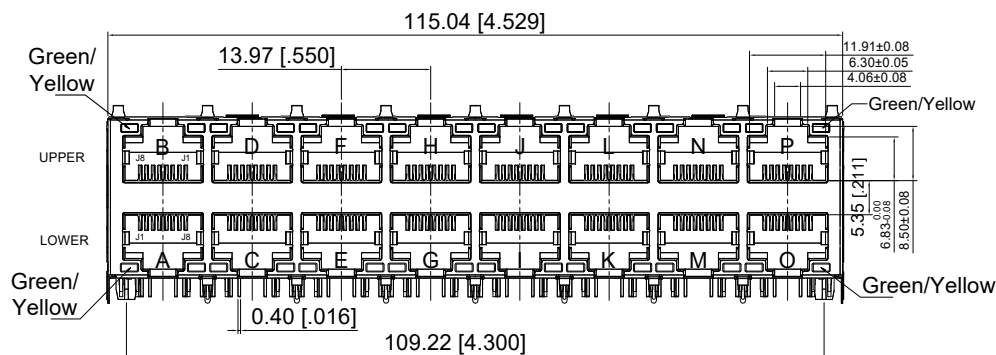


Mechanical

NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					


MATERIALS

- HOUSING: GLASS FILLED PA46(BLACK) UL94V-0(ROHS)
- CONTACT: PHOSPHOR BRONZE, 50-100 MICROINCHES MIN. OVERALL DUCTILE NICKEL UNDERPLATE WITH SELECTED 30 MICROINCHES GOLD AT MATING INTERFACE
- SHIELD: 0.2mm THICKNESS WITH BRASS.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68 SUBPART F
- THE PART IS RECOMMENDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260°C MAX, 10 SECS MAX.
- OPERATING TEMPERATURE: 0°C TO +70°C.
STORAGE TEMPERATURE: -40°C TO +85°C.

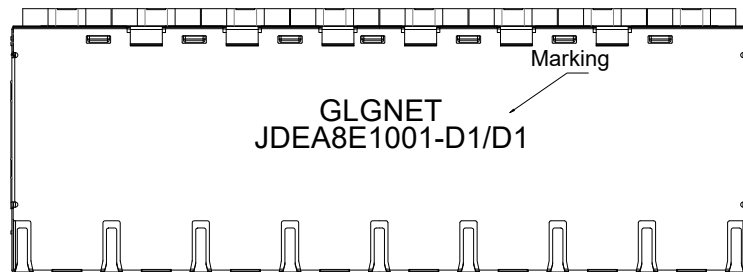

产品客户图 Customer Drw				GLGNET® 深圳市方向电子股份有限公司			
未注公差	0.XX	±0.10	TOLERANCE UNLESS OTHERWISE SPECIFIED	SHEN ZHEN GLGNET ELECTRONICS CO., LTD.			
	X.XX	±0.25		Description RJ45 2X8/Through Hole/UPoE+(60W) 1000 Base-T W/LED			
	XX.XX	±0.25		X° ±2°			
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN	WANGKG	2022.06.07	品名 TITLE	JDEA8E1001-D1/D1
张数 SHEET	1/3	大小 SIZE	校对 CHECKED	DANNY	2022.06.07	料号 ITEM NO.	
单位 UNIT	mm	版本 REV.	核准 APPROVED	BYANG	2022.06.07	图号 DWG NO.	

NO.	ECN NO.	DESCRIPTION	REV.	DRAW	DATE
1					
2					
3					

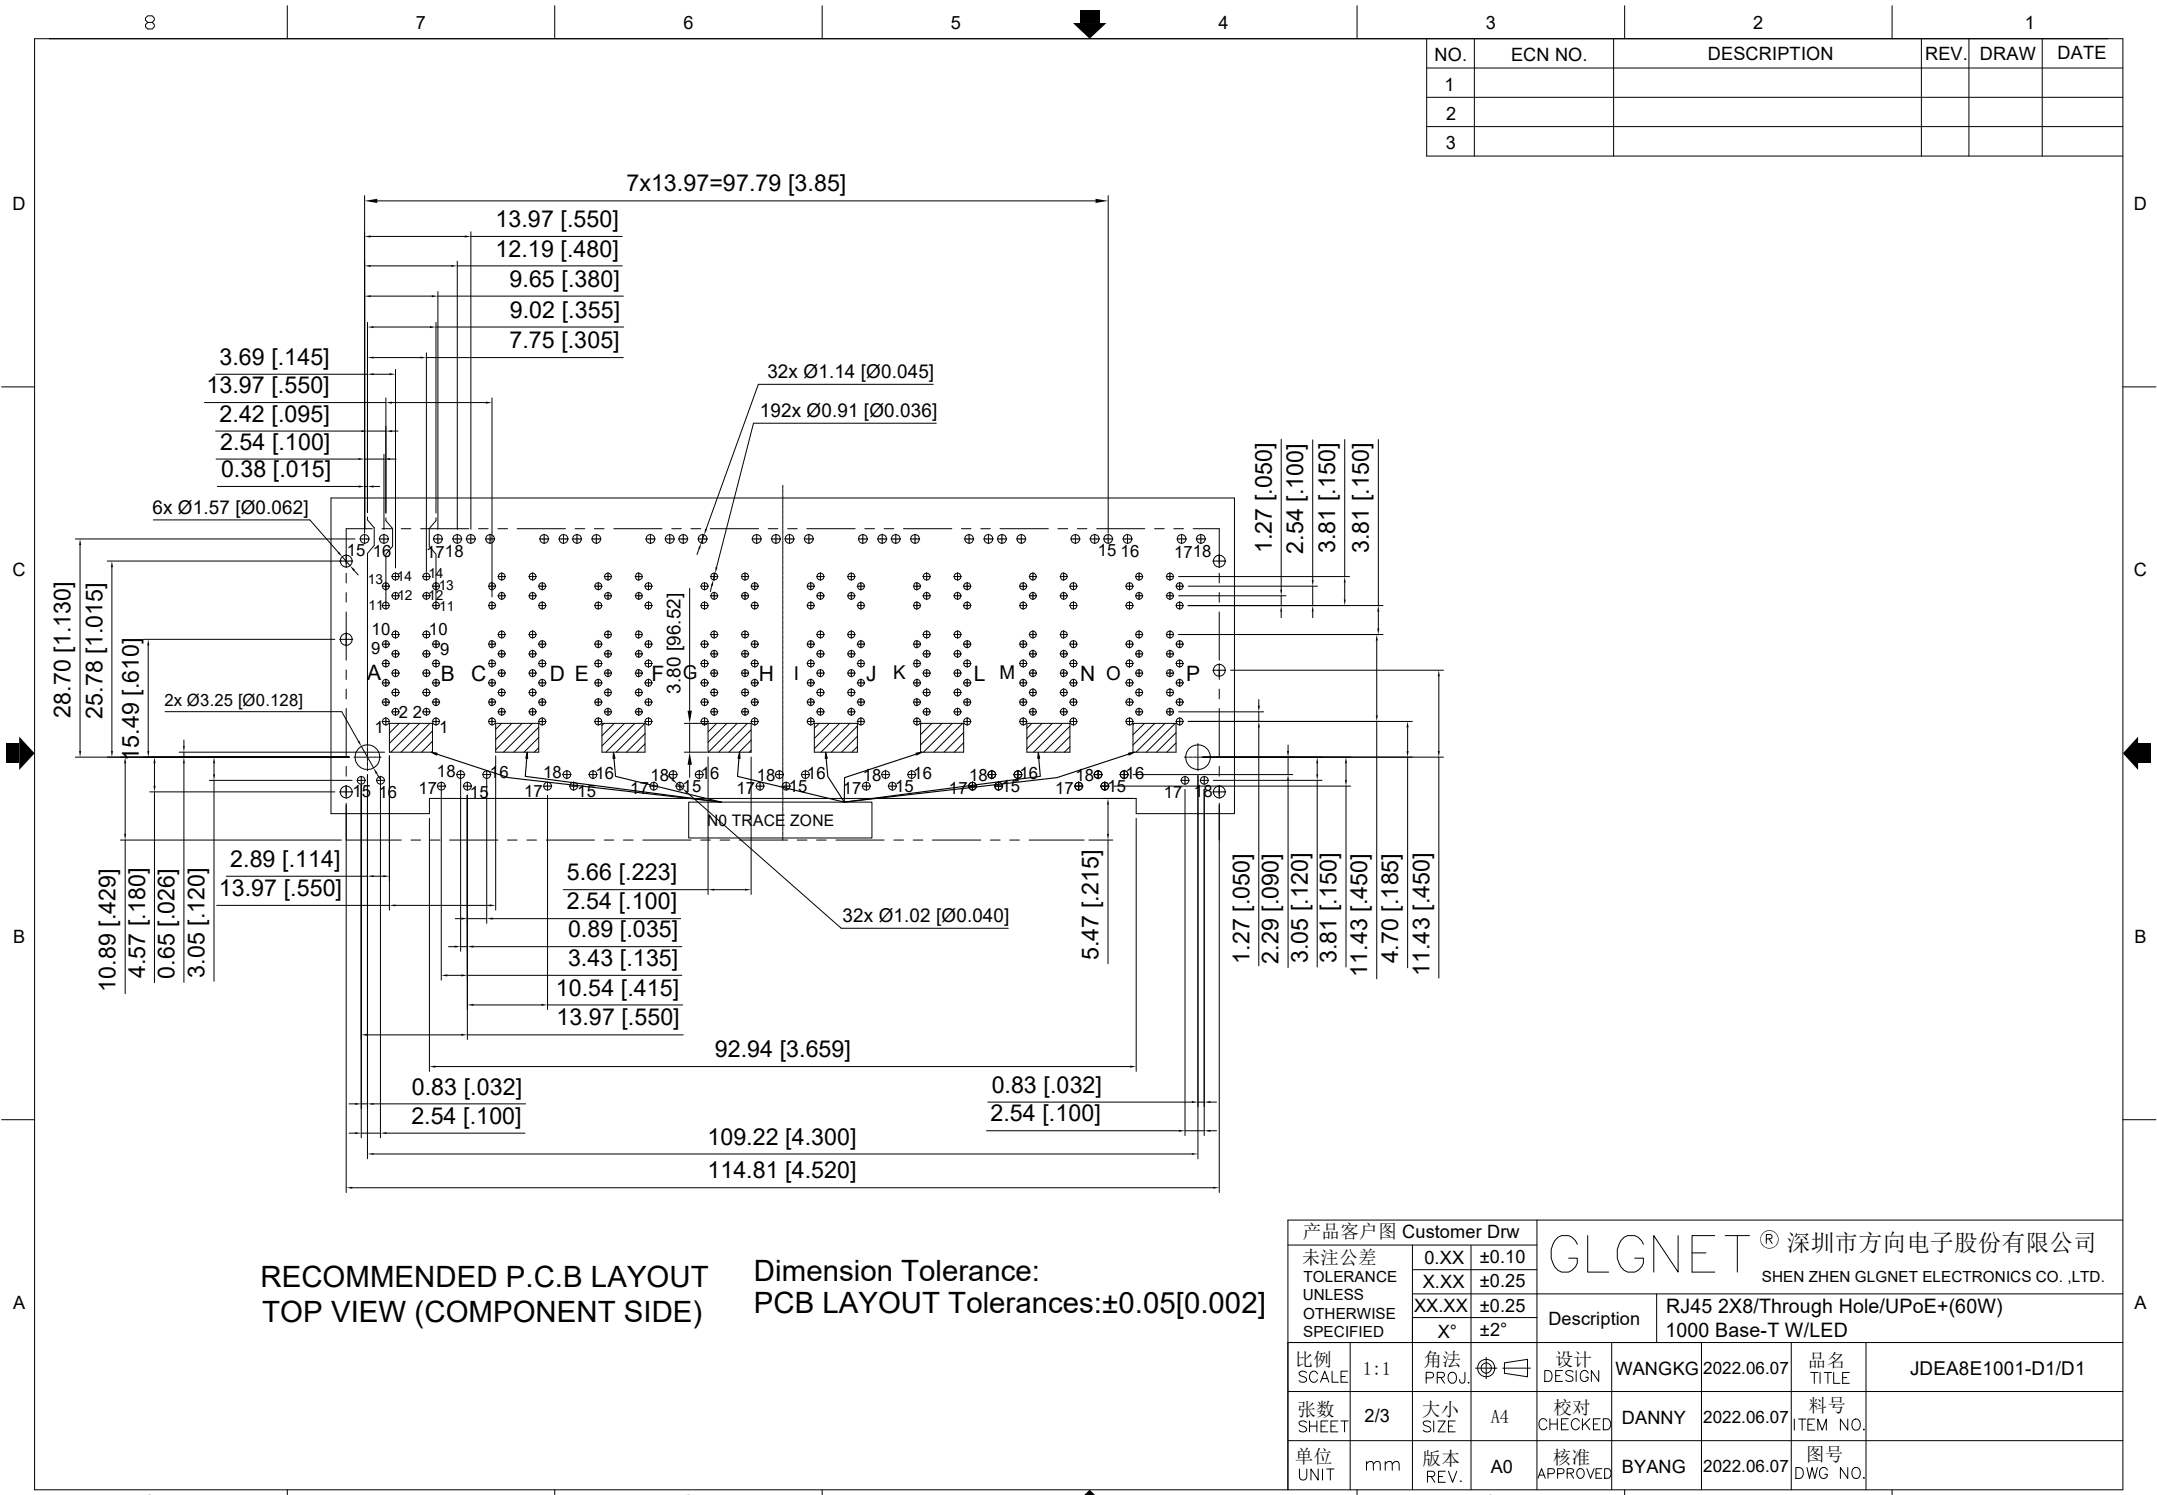

RECOMMENDED P.C.B LAYOUT TOP VIEW (COMPONENT SIDE) Dimension Tolerance: PCB LAYOUT Tolerances:±0.05[0.002]

产品客户图 Customer Drw				GLGNET® 深圳市方向电子股份有限公司				
未注公差	0.XX	±0.10	Description	RJ45 2X8/Through Hole/UPoE+(60W)			品名 TITLE	JDEA8E1001-D1/D1
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.XX	±0.25		1000 Base-T W/LED				
	XX.XX	±0.25						
比例 SCALE	1:1	角法 PROJ.	设计 DESIGN	WANGKG	2022.06.07	料号 ITEM NO.		
张数 SHEET	2/3	大小 SIZE	校对 CHECKED	DANNY	2022.06.07	图号 DWG NO.		
单位 UNIT	mm	版本 REV.	核准 APPROVED	BYANG	2022.06.07			

